


AC MOBILITY

Quality Access Ramps Australian Engineering

tyrex

Tyrex Recycled Rubber Door & Step Ramps

Stay-put anti-slip ramps suitable for interior and exterior use to provide anti-trip and wheelchair access to steps and thresholds. On uneven surfaces tyrex ramps will flex and grip to provide a more stable footing than ramps made from more rigid materials.

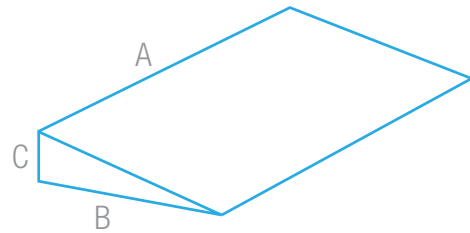

Australian Standard Ramps (AS1428.1 2001) Normal Dimensions (mm) & Weights (kg)

A	B	C	kg
900	120	15	1.00
900	160	20	1.50
900	200	25	2.25
900	240	30	3.00
900	280	35	4.25
900	320	40	5.00
900	360	45	6.50
900	400	50	8.50
900	440	55	10.0
900	480	60	11.0
900	520	65	13.0
900	560	70	16.0
900	600	75	18.0
900	640	80	20.0
900	680	85	23.0
900	720	90	26.0
900	760	95	28.0
900	800	100	30.0

Max 900 1200 150 75.0

gradient 1:8, colour black

Wedge Ramps Normal Dimensions (mm) & Weights (kg)


A	B	C	kg
900	150	15	1.25
900	150	20	1.50
900	150	25	1.75
900	150	30	2.00
900	200	35	3.00
900	200	40	3.25
900	300	45	5.00
900	300	50	5.50

colour grey

Additional sizes/colours made to order - will attract tooling charges and 10-15 day manufacturing time

Ramps may be adhered or mechanically fixed. Fixing may not be necessary if ramps are positioned on carpet.

Tyrex Recycled Rubber Wing Ramps

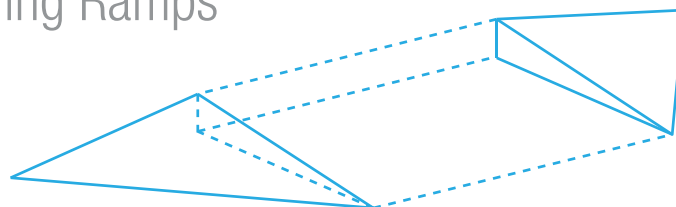

Tyrex Recycled Rubber Shower Water Retention Ramps

Ideal to replace shower recess hobs and provide easy access for wheelchairs and persons inconvenienced by step-over structures.

- Coloured black and white
- Fully sealed
- Anti-trip safety ramps on both sides
- Anti-slip surface
- Easily cut to fit shower recesses and many other areas requiring a barrier to water egress
- Can be flexed and adhered to seal slightly uneven surfaces
- Tyrex CleanCare anti-slip floor mats are also available to provide surer footing in wet areas
- Standard length 1200mm, thickness 10 mm

